





ENERG

енергия · ενεργεια


Y IJA
IE IA

STIEBEL ELTRON


LWZ 05.1 Plus
H(K)WL 230

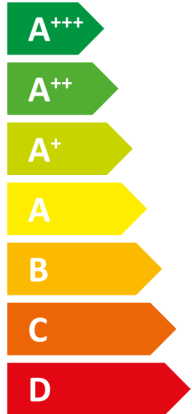

A++

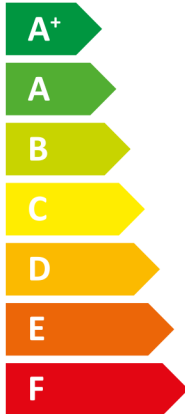

A



■ 5 kW
■ **5 kW**
■ 3 kW

2019

811/2013

Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

		LWZ 05.1 Plus H(K)WL 230
		206283
Manufacturer		STIEBEL ELTRON
Load profile		XL
Space heating energy efficiency class under average climate conditions, medium-temperature applications (A+++ -> D)		A++
Energy efficiency class, space heating under average climate conditions, low-temperature applications (A+++ -> D)		A++
Energy efficiency class, DHW heating under average climate conditions (A+++ -> D)		A
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	5
Rated heating output under average climate conditions for low-temperature applications (P rated)	kW	5
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	3447
Annual energy consumption under average climate conditions for low-temperature applications (QHE)	kWh/a	2643
Annual power consumption under average climate conditions (AEC)	kWh	1676.000
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s)	%	128
Seasonal space heating energy efficiency under average climate conditions for low-temperature applications (η_s)	%	168
Energy efficiency, DHW heating (η_{wh}), under average climate conditions	%	120
Sound power level, indoor	dB(A)	53
Option for operation only at off-peak times		-
Special measures		Alle beim Zusammenbau, der Installation oder Wartung des Raumheizgerätes zu treffenden besonderen Vorkehrungen: Siehe Installation und Montageanweisung
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	5
Rated heating output under colder climate conditions for low-temperature applications (P rated)	kW	5
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	3
Rated heating output under warmer climate conditions for low-temperature applications (P rated)	kW	3
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	8174
Annual energy consumption under colder climate conditions for low-temperature applications (QHE)	kWh/a	3320
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	2420
Annual energy consumption under warmer climate conditions for low-temperature applications (QHE)	kWh/a	772
Annual power consumption under colder climate conditions (AEC)	kWh	2042.000
Annual power consumption under warmer climate conditions (AEC)	kWh	1183.000
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (η_s)	%	115
Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications (η_s)	%	155
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (η_s)	%	141
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s)	%	207
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s)	%	84
Energy efficiency, DHW heating (η_{wh}), warmer climates	%	145
Sound power level, outdoor	dB(A)	56



ENERG

енергия · ενεργεια



LWZ 05.1 Plus H(K)WL 230


STIEBEL ELTRON



A⁺⁺



A



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F

G

A⁺⁺

+



+



+



+



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F

G

A

Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

		LWZ 05.1 Plus H(K)WL 230
		206283
Manufacturer		STIEBEL ELTRON
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s)	%	128
Temperature control class		VI
Contribution of temperature control to space heating energy efficiency	%	4
Space heating energy efficiency of package under average climate conditions	%	132
Space heating energy efficiency of package under colder climate conditions	%	107
Space heating energy efficiency of package under warmer climate conditions	%	153
Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions	%	13
Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions	%	13
Space heating energy efficiency class under average climate conditions, medium-temperature applications (A+++ -> D)		A++
Space heating energy efficiency class of package under average climate conditions (A+++ -> D)		A++
Energy efficiency class, DHW heating under average climate conditions (A+++ -> D)		A
Load profile		XL

Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

		LWZ 05.1 Plus H(K)WL 230
		206283
Manufacturer		STIEBEL ELTRON
Heat source		Luft
Low temperature heat pump		x
With auxiliary heater		x
Combination heater with heat pump		x
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	5
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	5
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	3
Tj = -7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	5.3
Tj = -7 °C heating output, partial load range under average climate conditions (Pdh)	kW	4.9
Tj = 2 °C heating output, partial load range under colder climate conditions (Pdh)	kW	3.3
Tj = 2 °C heating output, partial load range under average climate conditions (Pdh)	kW	3.0
Tj = 2 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	6.9
Tj = 7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	2.8
Tj = 7 °C heating output, partial load range under average climate conditions (Pdh)	kW	2.2
Tj = 7 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	4.5
Tj = 12 °C heating output, partial load range under colder climate conditions (Pdh)	kW	3.2
Tj = 12 °C heating output, partial load range under average climate conditions (Pdh)	kW	2.6
Tj = 12 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	3.2
Tj = dual mode temperature under colder climate conditions (Pdh)	kW	5.3
Tj = dual mode temperature under average climate conditions (Pdh)	kW	4.9
Tj = dual mode temperature under warmer climate conditions (Pdh)	kW	6.9
Tj = operating temperature limit under colder climate conditions (Pdh)	kW	3.3
Tj = operating temperature limit under average climate conditions (Pdh)	kW	4.6
Tj = operating temperature limit under warmer climate conditions (Pdh)	kW	6.9
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW	2.0
Dual mode temperature under colder climate conditions (Tbiv)	Grad C	-7
Dual mode temperature under average climate conditions (Tbiv)	Grad C	-7
Dual mode temperature under warmer climate conditions (Tbiv)	Grad C	2
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (ηs)	%	115
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (ηs)	%	128
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (ηs)	%	141
Tj = -7 °C COP, partial load range under colder climate conditions (COPd)		2.52
Tj = -7 °C COP, partial load range under average climate conditions (COPd)		2.26
Tj = 2 °C COP, partial load range under colder climate conditions (COPd)		3.50
Tj = 2 °C COP, partial load range under average climate conditions (COPd)		3.27
Tj = 2 °C COP, partial load range under warmer climate conditions (COPd)		2.50
Tj = 7 °C COP, partial load range under colder climate conditions (COPd)		4.56
Tj = 7 °C COP, partial load range under average climate conditions (COPd)		4.19

Tj = 7 °C COP, partial load range under warmer climate conditions (COPd)		3.28
Tj = 12 °C COP, partial load range under colder climate conditions (COPd)		5.59
Tj = 12 °C COP, partial load range under average climate conditions (COPd)		5.32
Tj = 12 °C COP, partial load range under warmer climate conditions (COPd)		4.98
Tj = dual mode temperature under colder climate conditions (COPd)		2.52
Tj = dual mode temperature under average climate conditions (COPd)		2.24
Tj = dual mode temperature under warmer climate conditions (COPd)		2.50
Tj = operating temperature limit under colder climate conditions (COPd)		1.61
Tj = operating temperature limit under average climate conditions (COPd)		2.08
Tj = operating temperature limit under warmer climate conditions (COPd)		2.50
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (COPd)		2.05
Operating temperature limit under colder climate conditions (TOL)	Grad C	-22
Operating temperature limit under average climate conditions (TOL)	Grad C	-10
Operating temperature limit under warmer climate conditions (TOL)	Grad C	2
Operating temperature limit of heating water under colder climate conditions (WTOL)	Grad C	63
Operating temperature limit of heating water under average climate conditions (WTOL)	Grad C	75
Operating temperature limit of heating water under warmer climate conditions (WTOL)	Grad C	75
Power consumption, off-mode (Poff)	Watt	19
Power consumption, thermostat off-mode (PTO)	Watt	15
Power consumption, standby state (PSB)	Watt	19
Power consumption, operating state, with crankcase heating (PCK)	Watt	2
Rated heating output of auxiliary heater under colder climate conditions (PSUP)	kW	9.2
Rated heating output of auxiliary heater under average climate conditions (PSUP)	kW	0.8
Rated heating output of auxiliary heater under warmer climate conditions (PSUP)	kW	3.5
Type of energy supply, auxiliary heater		elektrisch
Output control		veränderlich
Sound power level, outdoor	dB(A)	56
Sound power level, indoor	dB(A)	53
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	8174
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	3447
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	2420
Flow rate on heat source side		-
Load profile		XL
Daily power consumption under colder climate conditions (QELEC)		-
Daily power consumption under average climate conditions (QELEC)	kWh	6.350
Daily power consumption under warmer climate conditions (QELEC)		-
Annual power consumption under colder climate conditions (AEC)	kWh	2042.000
Annual power consumption under average climate conditions (AEC)	kWh	1676.000
Annual power consumption under warmer climate conditions (AEC)	kWh	1183.000
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (ηs)	%	84
Energy efficiency, DHW heating (ηwh), under average climate conditions	%	120
Energy efficiency, DHW heating (ηwh), warmer climates	%	145
Special measures		Alle beim Zusammenbau, der Installation oder Wartung des Raumheizgerätes zu treffenden besonderen Vorkehrungen: Siehe Installation und Montageanweisung